



DS-2CD864-EI3 1.3MP IR Bullet Camera

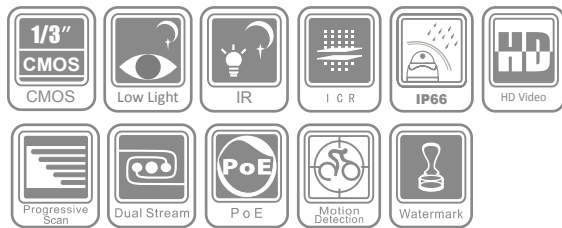

Key features

- 1.3 megapixel high resolution
- HD video output
- Low illumination
- IP66 rating
- IR range: up to 30m
- True day / night

Dimensions

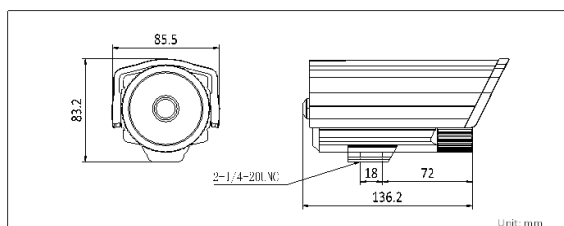

Accessories



DS-1212ZJ
(Indoor wall mount)



DS-1213ZJ
(Indoor/Outdoor Wall Mount)

Specifications

DS-2CD864-EI3	
Camera	
Image sensor	1/3" progressive scan CMOS
Min. illumination	0.01 lux @F1.2, AGC ON 0 lux with IR
Shutter time	1/25s ~ 1/100,000s
Lens	6 mm @F2.15, angle of view: 45.3° (2.8mm, 4mm, 12mm, 16mm optional)
Lens mount	M12
Day & night	IR cut filter with auto switch
Compression Standard	
Video compression	H.264 / MPEG4 / MJPEG
Bit rate	32 Kbps ~ 16 Mbps
Image	
Max. Image Resolution	1280 × 960
Frame rate	50Hz: 25fps (1280 × 960), 25fps (1280 × 720) 60Hz: 30fps (1280 × 960), 30fps (1280 × 720)
Image settings	Saturation, brightness, contrast adjustable through client software or web browser
Network	
Network storage	NAS (iSCSI optional)
Alarm trigger	Motion detection, tampering alarm, network disconnect, IP address conflict, storage exception
Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, SNMP, HTTPS, FTP, 802.1x, Qos (SIP, SRTP, IPv6 optional)
Interoperability	ONVIF, PSIA, CGI
Security	User authentication, watermark, dual stream, video masking, mirror, heartbeat
Interface	
Communication interface	1 RJ45 10 M / 100 M Ethernet interface
General	
Operating conditions	-10 °C ~ 60 °C (14°F ~ 140 °F) humidity 90% or less (non-condensing)
Power supply	12 VDC ± 10% , PoE (802.3af)
Power consumption	Max. 6.5W
Weather proof rating	IP66
IR range	Approx 20 to 30 meters
Dimensions	85.5 × 83 × 165 mm
Weight	1000g

Available models

DS-2CD864-EI3

* Product picture and technical specs subject to change without previous notice.
For product availability, please contact our local sales representatives.